

## 200SLC-EVO

Pioneer Prime Vacuum Assisted  
Stage V Diesel-Driven Centrifugal Pump  
Sound Attenuated Canopy Package

### Pump Specifications

Model	PP88S12
Size	8 x 8" (200 x 200 mm)
Max Flow	910 m <sup>3</sup> /h
Max Head	36 m
Solids Size	3" (76 mm)

### Engine Specifications

Engine Type	Perkins 404J-E22TA, Diesel
Displacement	2.2 l
Fuel Consumption at BEP	11.2 l/h @ 1800 rpm
Max Running Hours at BEP	38 h @ 1800 rpm
Continuous Power	74 HP (55 kW) @ 1800 rpm
Aftertreatment Specifics (DEF, DOC, SCR, etc.)	Diesel Particulate Filter, Diesel Oxidation Catalyst
Emissions Compliance	EU Stage V

### Priming System

Priming System	Mechanically Driven Vacuum Pump
Air Removal Capacity	24 l/s (50CFM)
Priming Chamber	Air Separation Pioneer Prime w/SS Components
Discharge Check Valve	Ductile Iron Body; Nitrile Rubber Ball
Run Dry System	Oil Reservoir for Mechanical Seal; Indefinite Run-Dry Capability

## Features

- Indefinite Run-Dry Capability
- Environmentally Safe Priming System with Patented PosiValve™
- Spark Arresting Silencer
- Auxiliary Fuel Tank Connections
- Digital Fuel Level Gauge
- Digital Suction & Discharge Pressure Transducers
- Quick Connect Suction & Discharge Couplings

## Options and Accessories

Telemetry	Full Control & Remote Monitoring with Alerts
Certified Spark Arrestor	ATEX Approved
Trailers	EU Approved, Fast Tow or Plant Trailers & Heavy Duty Non-EU Site Tow Trailer
Safety	Air Intake Shutdown Valve
Battery Standby	Solar Panel Trickle Charger
Materials	Duplex Stainless Steel Available


## Package Specifications

Fuel Tank Capacity	430 l
Control Panel	E400 Auto Stop/Start
Operating Speed (Min. /Max.)	1400 - 1800 rpm
Weight (Dry / Wet)	2130 kg / 2500 kg
Dimensions (L x W x H)	2637 x 1214 x 1858 mm
Enclosure dB(A) Rating	64 dB(A) @ 7m
Canopy Material & Finish	Steel, Painted, RAL6005
Skid/Bund Material & Finish	Carbon Steel, Hot Dip Galvanised

## Materials of Construction

Impeller	CA6NM Stainless Steel
Shaft	17-4 PH Stainless Steel
Wear Ring	ASTM A48 Class 40 Gray Iron
Volute	Ductile Iron ASTM A536 65-45-12
Mechanical Seal	Silicon Carbide Rotating vs Tungsten Carbide Stationary, Fluoroelastomers

### Mechanical Dimensions & Weights

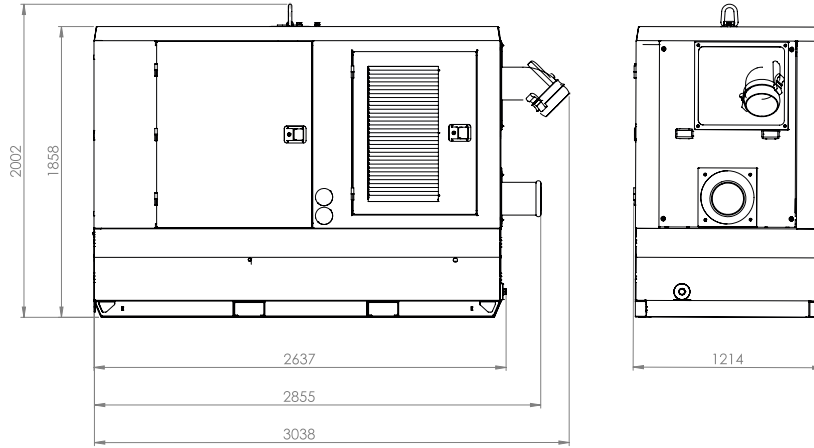

Weight (Dry / Wet): 2130 kg / 2500 kg

### Performance Curve

Model: PP88S12

Impeller Diameter: 11.79"

Solids Size: 3"

